


# **Vision** Module System

The state of the art system for overhead solar

## System Overview

The Vision Module System is an integrated module and racking system that offers designers unparalleled freedom to meet their project's power and light transmittance requirements with an off-the-shelf, modular system. The Vision Module System is based on glass-glass bifacial modules available in two primary form factors, each with a variety of cell layout and mounting options.


- Numerous cell layout options
- Ultra durable glass glass construction
- Integrated wireway
- Concealed conductors
- Concealed junction boxes
- Weatherproofing

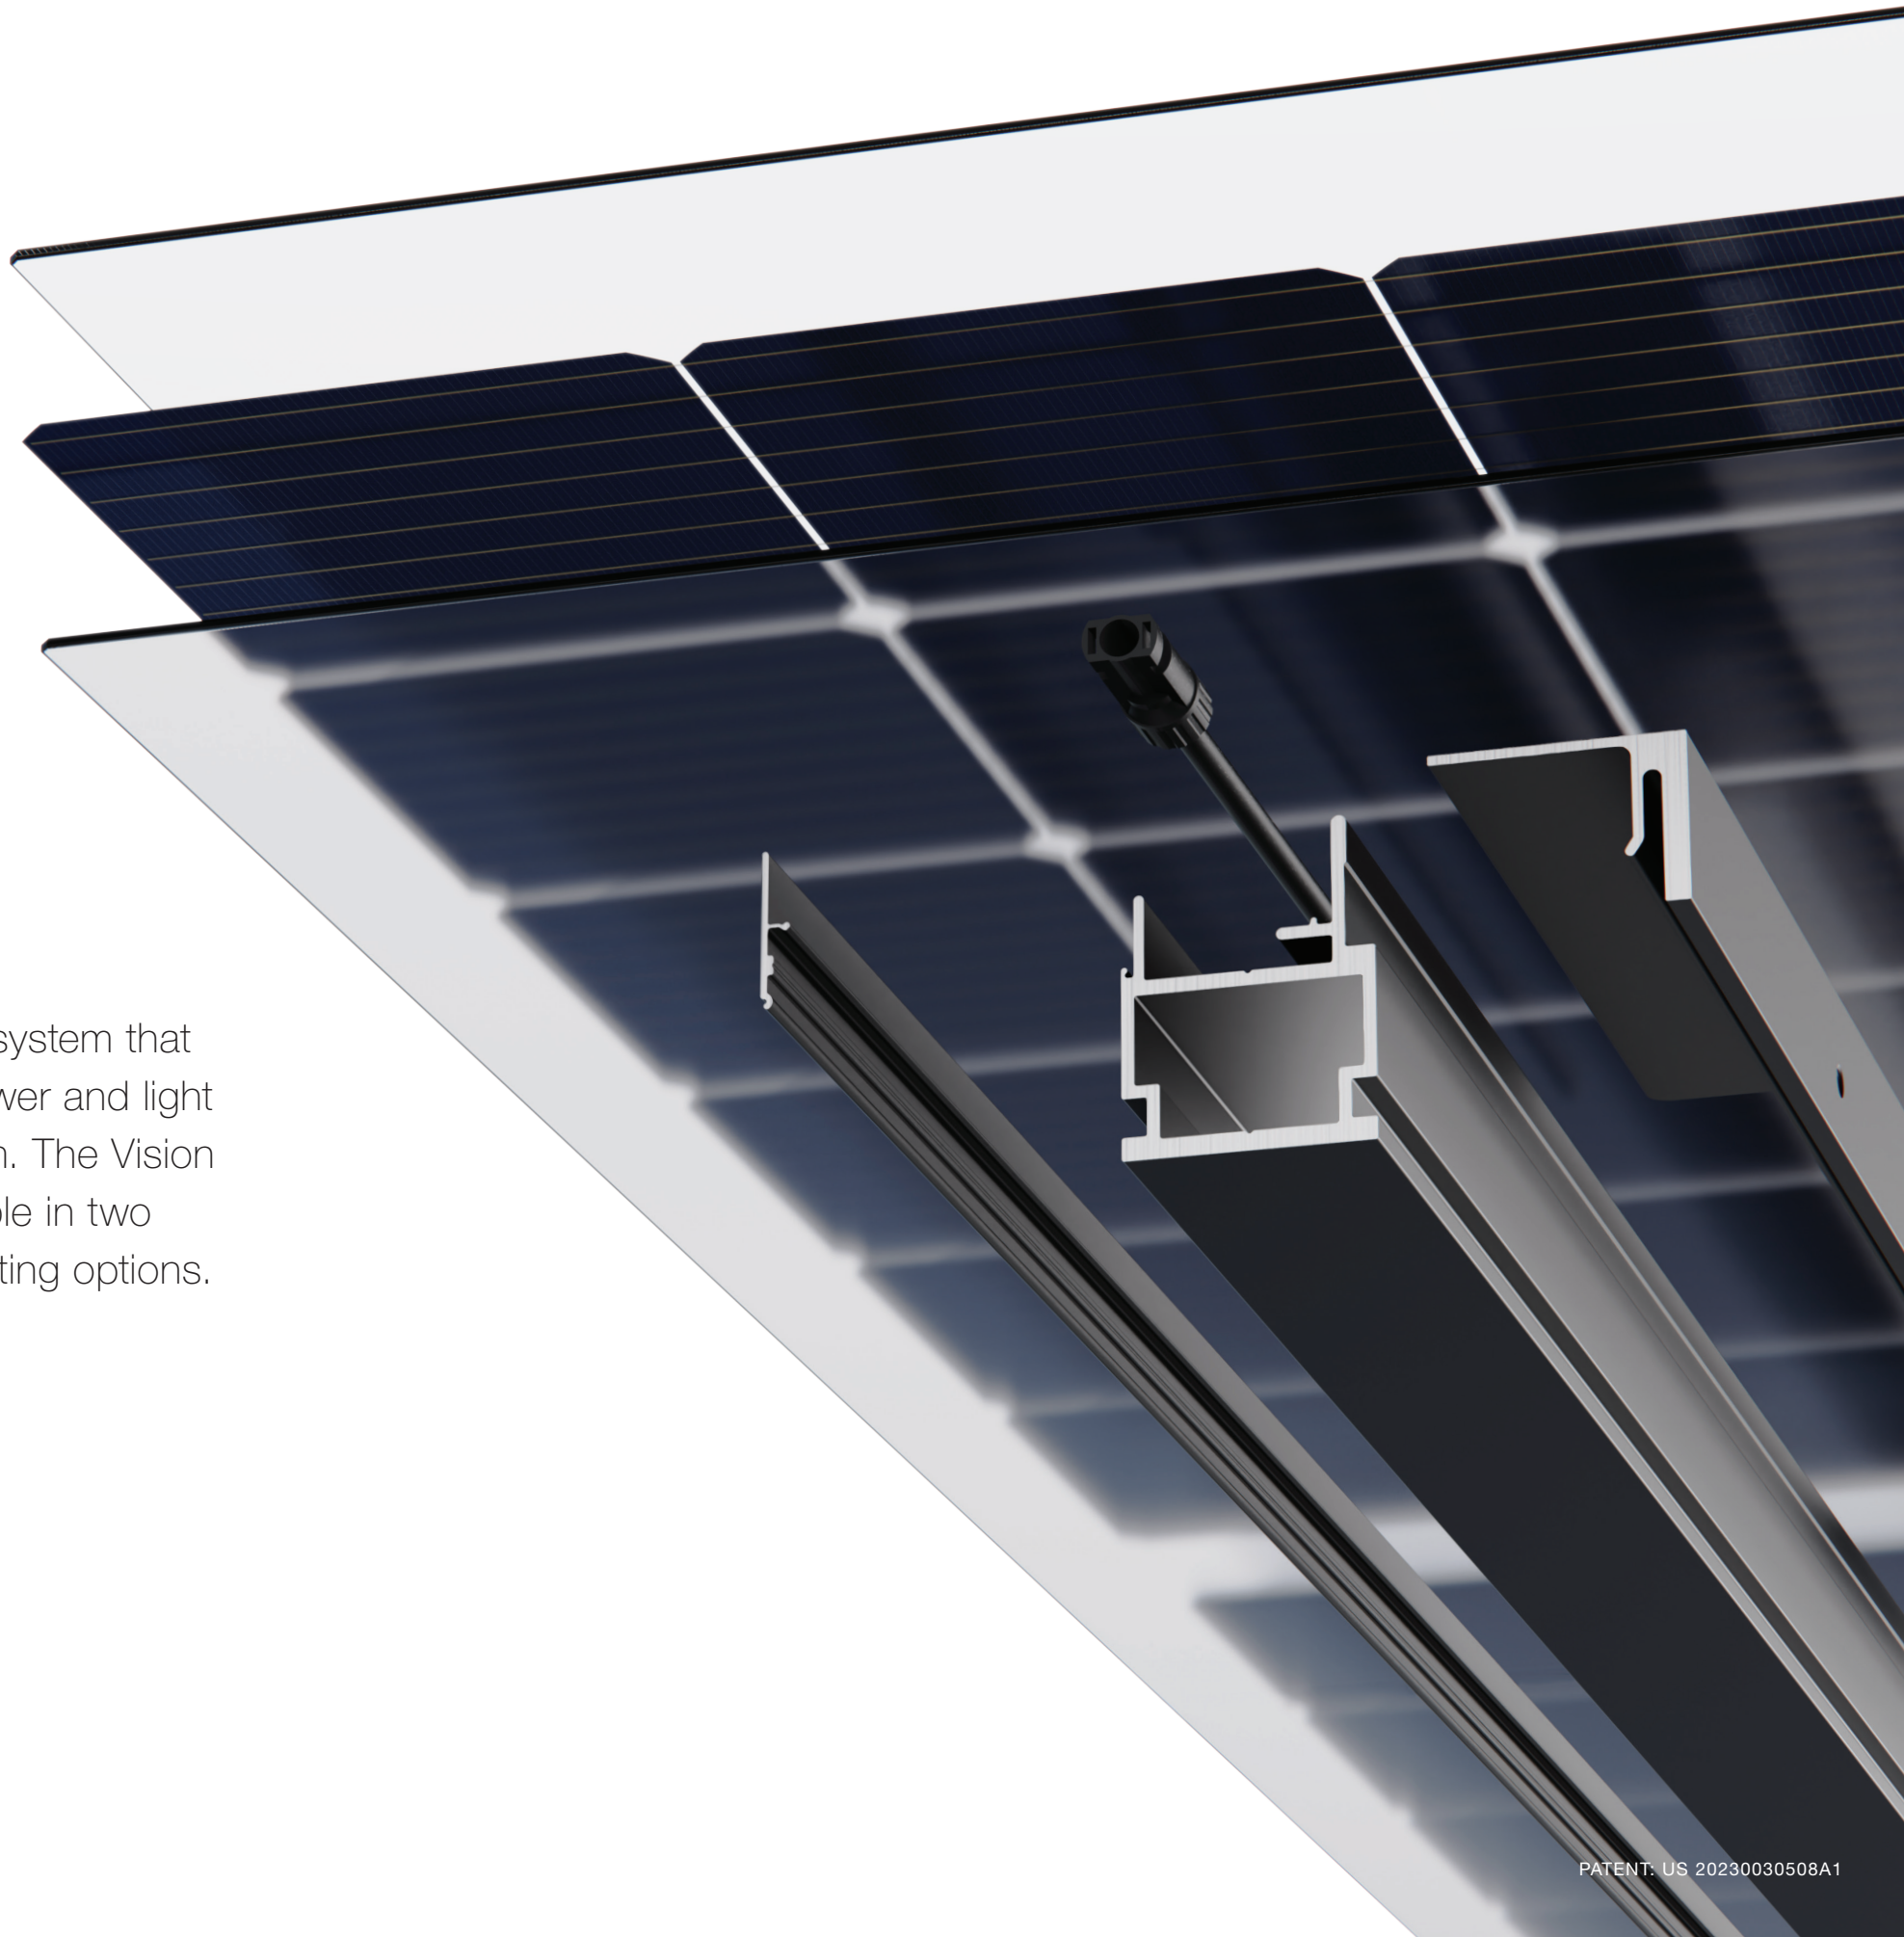

# Module Overview

The Vision Module System is based on two primary module Types: L Type or S Type. L Type modules have a maximum of 72 cells and S Type modules have a maximum of 60 cells. Each module Type offers unique mounting options for another level of customization.


## L TYPE

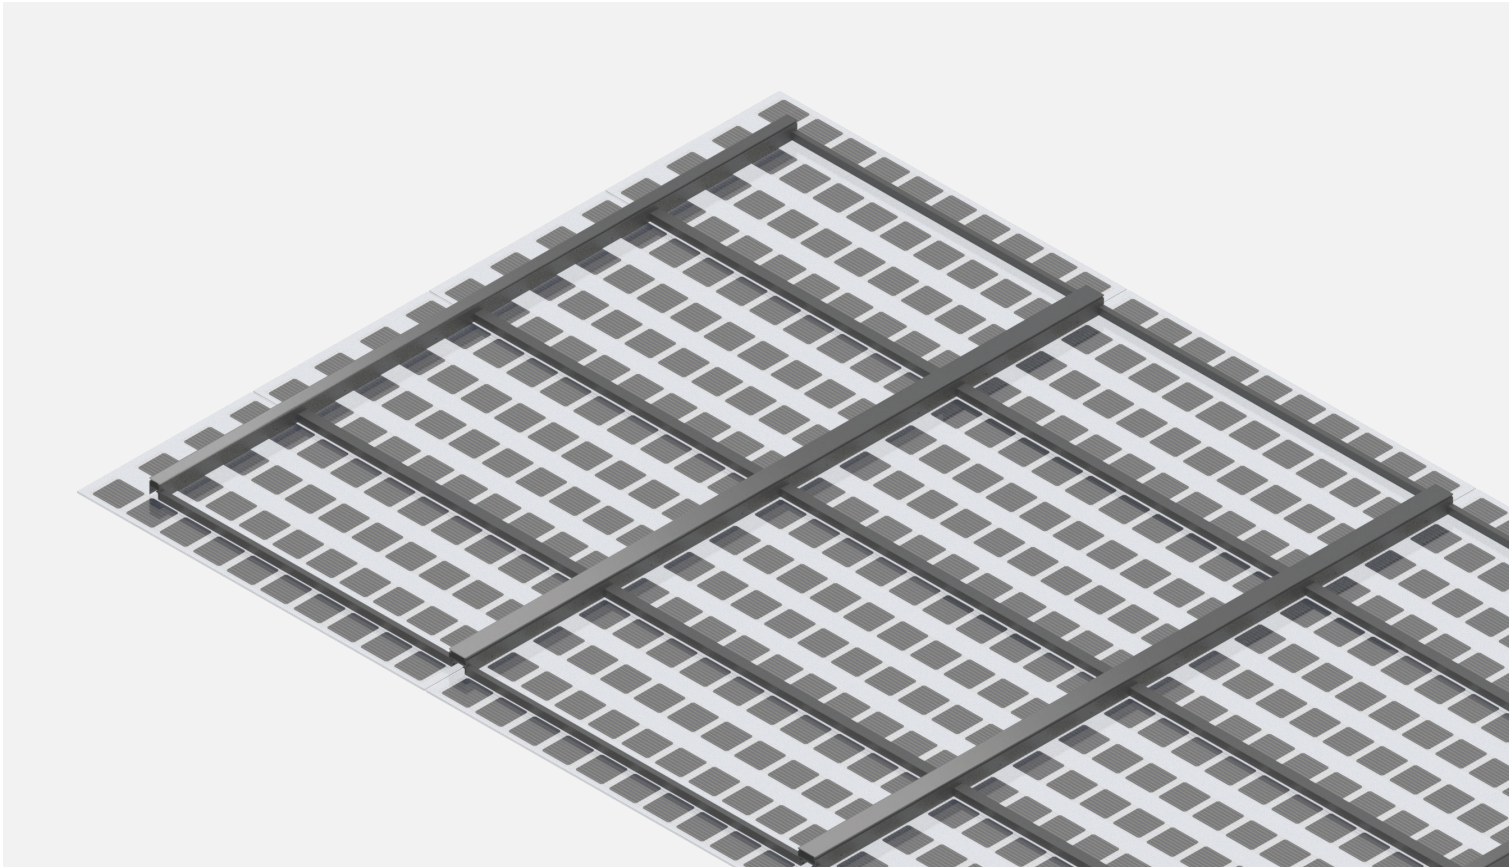

The L Type mounting options create cantilevered glass edges for a floating glass edge at the perimeter of your array.

- Cantilevered edge
- Edge and shared rails
- Ideal for contiguous arrays

## S TYPE

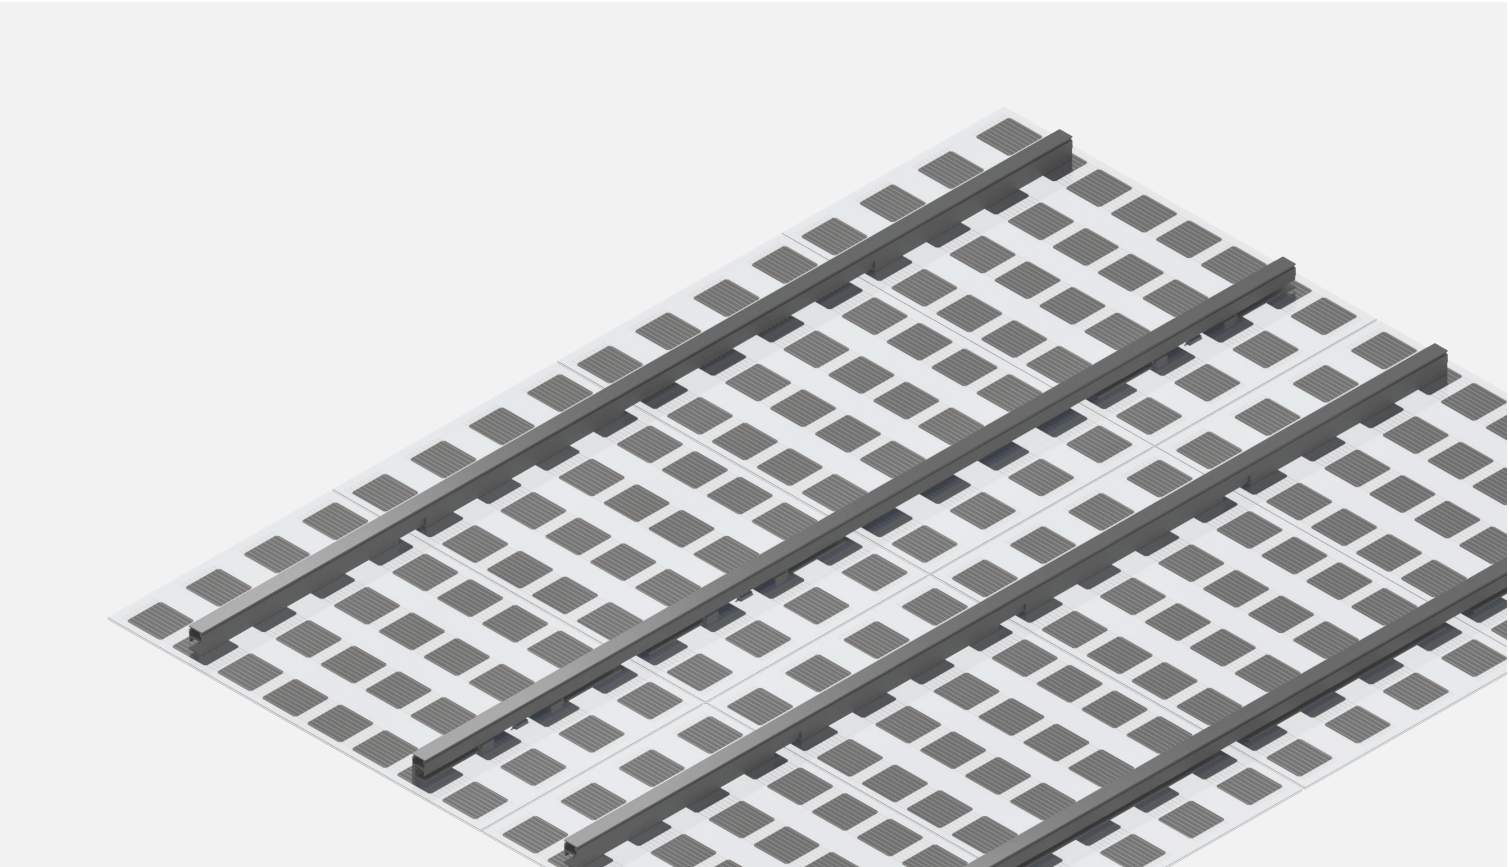

The S Type is an interior mount solution meaning all edges of the module are exposed. It's ideal for unique module mounting scenarios and non-contiguous arrays.

- Floating edges on all sides
- Edge rails only
- Ideal for unique configurations

# Module Configurations

The Vision Module System is configured by selecting one of each:

- Type:** Specifies module dimension
- Matrix:** Specifies cell count
- Mount:** Specifies the mounting frame Type

# Part Number Configuration

SELECT TYPE	L TYPE				S TYPE			
SELECT MATRIX	<b>72</b> 430 W • 08% T	<b>60</b> 355 W • 21% T	<b>40</b> 240 W • 47% T	<b>0</b> 0 W • 86% T	<b>60</b> 355 W • 13% T	<b>48</b> 285 W • 29% T	<b>32</b> 190 W • 50% T	<b>0</b> 0 W • 86% T
SELECT MOUNT	PM EM RM LM RC LC				IM			


**EXAMPLE PART NUMBER:** L - 72 - PM → L-72-430-08-PM

TYPE      MATRIX      MOUNT


\* Power Output is Rated Power at STC (front side); Light Transmittance is calculated based on cell coverage and not a result of testing.

## L TYPE      S TYPE

**Step 1:**  
Select Type



Note: L and S Type modules are different widths due to the L Type mount options extending past the glass edge



**Step 2:**  
Select Matrix

<b>72 Cells</b> 430W 08% Transmittance	<b>60 Cells</b> 355W 21% Transmittance	<b>40 Cells</b> 240W 47% Transmittance	<b>0 Cells</b> 0W 86% Transmittance

<b>60 Cells</b> 355W 13% Transmittance	<b>48 Cells</b> 285W 29% Transmittance	<b>32 Cells</b> 190W 50% Transmittance	<b>0 Cells</b> 0W 88% Transmittance



**Step 3:**  
Select Mount

Left Corner (LC)	Edge Mount (EM)	Right Corner (RC)	Left Mount (LM)	Perimeter Mount (PM)	Right Mount (RM)

Interior Mount (IM)

# Module Specifications

TEMPERATURE COEFFICIENTS	
NOMINAL OPERATING CELL TEMPERATURE (NOCT)	44.6 °C
POWER TEMPERATURE COEFFICIENT (PMPP)	- 0.376% / °C
VOLTAGE TEMPERATURE COEFFICIENT (VOC)	- 0.322% / °C
CURRENT TEMPERATURE COEFFICIENT (ISC)	0.054% / °C

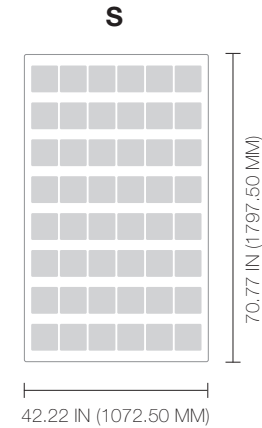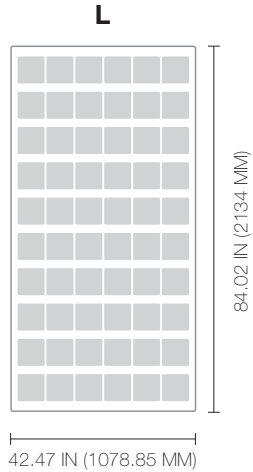


	L TYPE				S TYPE				
	CELLS	60	40	00	60	48	32	00	
<b>MATRIX</b>	<b>POWER</b>	430 W	355 W	240 W	0 W	355 W	285 W	190 W	0 W
	<b>TRANSMITTANCE</b>	8%	17%	43%	86%	13%	29%	50%	88%
<b>PEAK POWER VOLTAGE (VMP)</b>		39.9 V	32.9 V	22.24 V	0 V	32.9 V	26.6 V	17.7 V	0 V
<b>MAXIMUM POWER CURRENT (IMP)</b>		10.8 A	10.8 A	10.8 A	0 A	10.8 A	10.8 A	10.9 A	0 A
<b>OPEN CIRCUIT VOLTAGE (VOC)</b>		49.2 V	41.0 V	27.4 V	0 V	41.0 V	32.8 V	21.9 V	0 V
<b>SHORT CIRCUIT CURRENT (ISC)</b>		11.3 A	11.4 A	11.4 A	0 A	11.4 A	11.4 A	11.4 A	0 A
<b>MODULE EFFICIENCY</b>		18.8%	15.5%	10.5%	0%	18.4%	14.8%	9.9%	0%
<b>OPERATING TEMPERATURE</b>	- 40°C TO 85°C								
<b>MAXIMUM SYSTEM VOLTAGE</b>	1500 V								
<b>MAXIMUM TYPE FUSE RATING</b>	25 A								
<b>POWER TOLERANCE</b>	- 3/+3%								
<b>SOLAR CELL</b>	MONOCRYSTALLINE BIFACIAL 6.5" X 6.5" (166 MM X 166 MM)								
<b>CELL LAYOUT</b>	6 X 12	6 X 10	4 X 10	0	6 X 10	6 X 8	4 X 8	0	
<b>MODULE DIMENSIONS</b>	84.02 IN X 42.47 IN X 2.06 IN (2134 MM X 1078.85 MM X 52.17 MM)				70.77 IN X 42.22 IN X 2.06 IN (1797.50 MM X 1072.50 MM X 52.17 MM)				
<b>MODULE AREA</b>	24.6 FT² (2.3M²)				20.8 FT² (1.9M²)				
<b>FRONT / BACK GLASS</b>	FULLY TEMPERED 3.2MM LOW-IRON PV GLASS								
<b>MODULE WEIGHT</b>	105.5 LBS (47.8 KG)				78.6 LBS (35.6 KG)				
<b>SYSTEM WEIGHT / AREA</b>	SD 4.85 PSF (23.68 KG/M²) MD 5.06 PSF (24.71 KG/M²) HD 5.99 PSF (29.25 KG/M²)				SD 4.55 PSF (22.22 KG/M²) MD 4.81 PSF (23.48 KG/M²) HD 6.52 PSF (31.83 KG/M²)				
<b>STATIC LOAD</b>	MAX +105 PSF/ -108 PSF SEE ENGINEERING LETTER FOR TYPE SPECIFIC LOAD RATING								
<b>OUTPUT CABLES</b>	LEAD LENGTH 500MM STAUBLI MC4 CONNECTORS								
<b>FIRE RATING</b>	CLASS A / TYPE 29								
<b>CERTIFICATIONS</b>	UL 61730								
<b>WARRANTY</b>	10 YEARS WORKMANSHIP / 30 YEARS LINEAR POWER PRODUCTION (POWER PRODUCTION WARRANTY ON FRONT SIDE STC ONLY)								

# Array Configuration


The Vision System features an easy to design and install mounting rail system. Mounting rails run in portrait mode, parallel with the short side of the glass and feature integrated wire ways that conceal all conductors and module junction boxes.

## ASSEMBLY

Vision Module System features a simple, adjustable and unique mounting system. Vision modules are mounted to the mounting rail by placing the module anywhere desired along the rail and then tightening with a simple set screw.

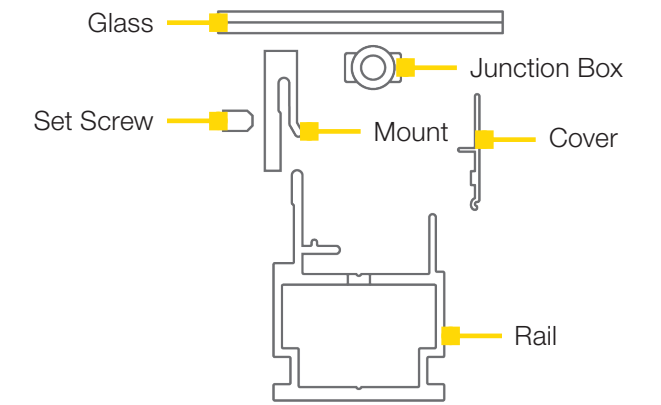


## L TYPE

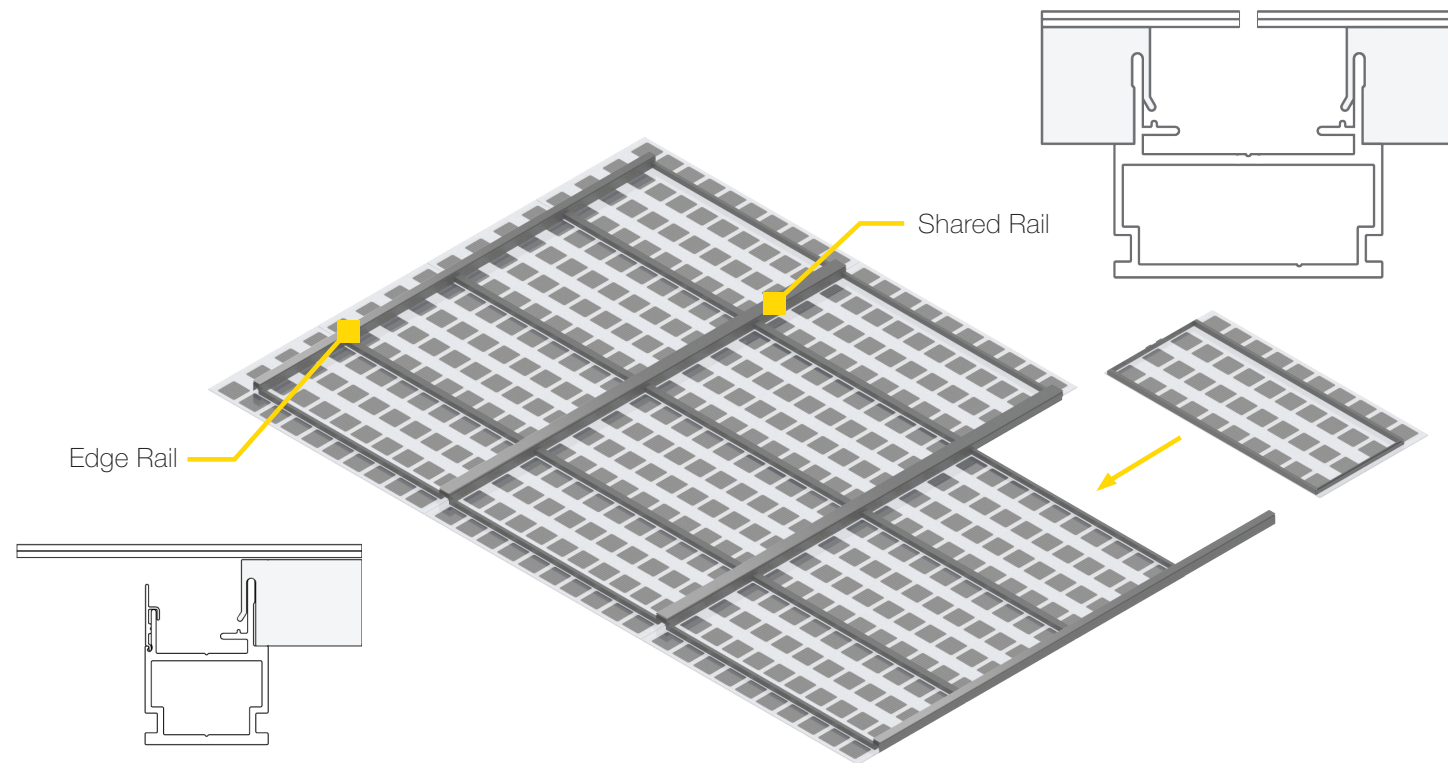

The L Type mounting options include long edge, short edge and corner mounts that create cantilevered glass edges for a floating glass edge at the perimeter of your array. The L Type also includes full perimeter mount options for the interior of the array.

## S TYPE

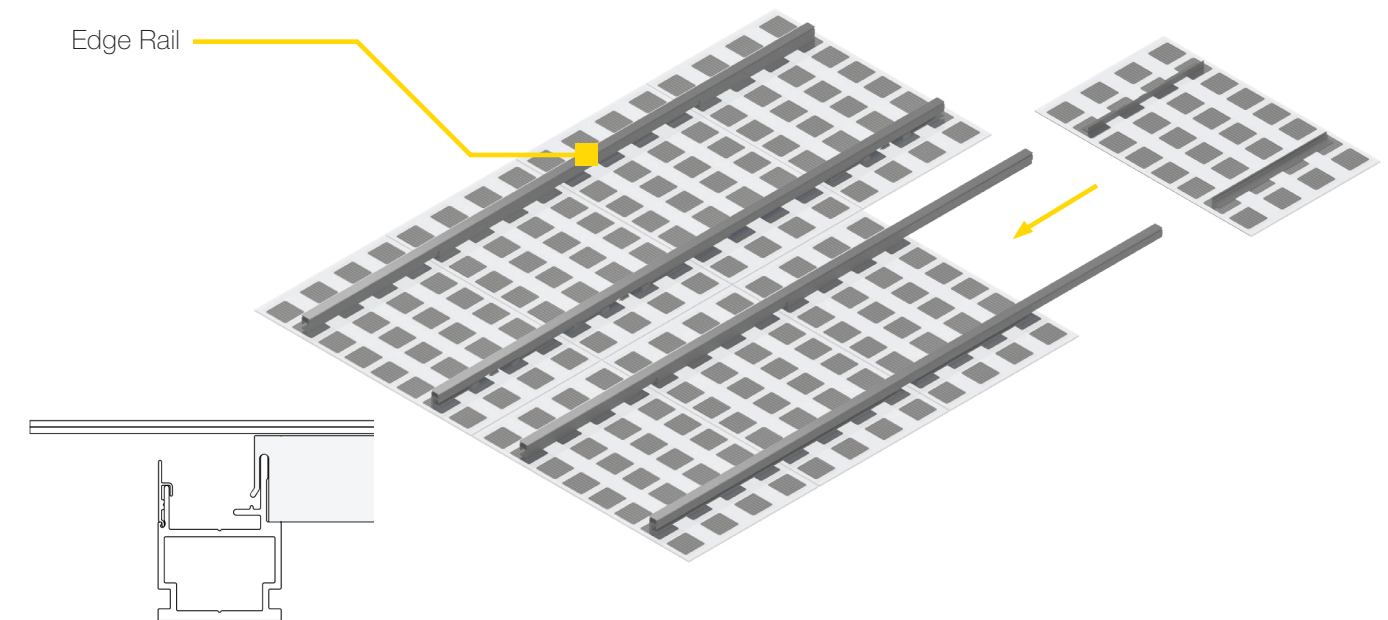


The S Type modules feature interior mounts that provide floating glass edge visible on all sides of the module. The modules are all mounted using Edge Rail meaning there are no shared rails. The S Type modules are ideal for unique installations and mounting configurations.


# Vision Mounting Rail

The Vision Module System is based on the streamlined integration of the module and mounting rail which results in a super clean and durable installation.


## SISTERED RAIL



**SISTERED EDGE RAIL**




**SISTERED SHARED RAIL**

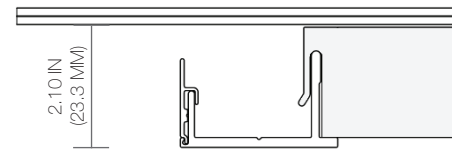


2.10 IN  
(53.3 MM)

## STANDARD DUTY RAIL (SD)




2.50 IN  
(63.5 MM)

**SD EDGE RAIL**



4.25 IN  
(107.95 MM)


**SD SHARED RAIL**

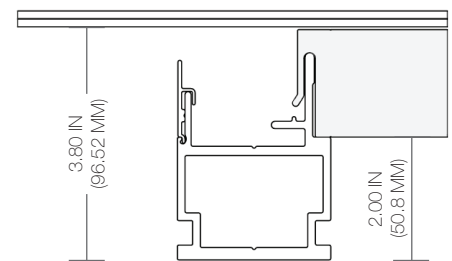

3.80 IN  
(96.52 MM)


2.00 IN  
(50.8 MM)

## MEDIUM DUTY RAIL (MD)




2.50 IN  
(63.5 MM)

**MD EDGE RAIL**



4.25 IN  
(107.95 MM)

**MD SHARED RAIL**

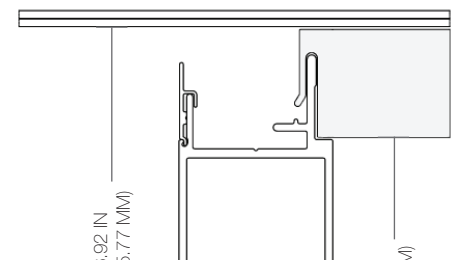

6.92 IN  
(175.77 MM)


5.13 IN  
(130.32 MM)

## STANDARD RAIL LENGTHS

127.42 IN (3236.55 MM)


254.85 IN (6473.1 MM)

## HEAVY DUTY RAIL (HD)

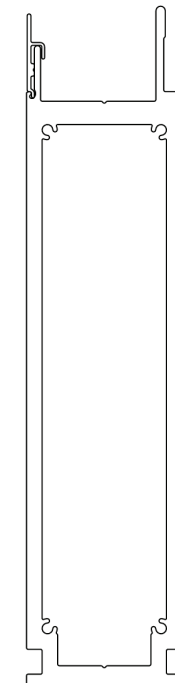


2.50 IN  
(63.5 MM)

**HD EDGE RAIL**

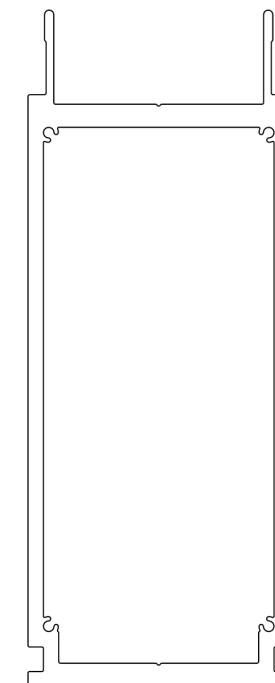

4.25 IN  
(107.95 MM)

**HD SHARED RAIL**

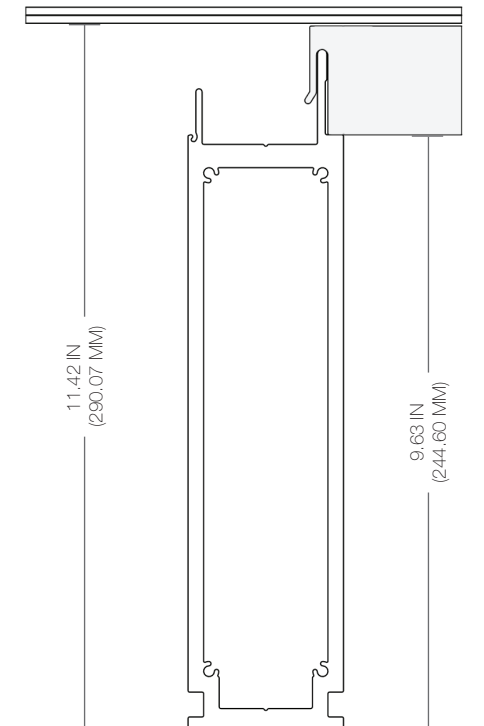

11.42 IN  
(290.07 MM)

9.63 IN  
(244.60 MM)

## TYPICAL RAIL SPANS

			SD	MD	HD
	WIND SPEED (MPH)	SNOW LOAD (PSF)	MAX SPAN (FT)	MAX SPAN (FT)	MAX SPAN (FT)
<b>HONOLULU</b>	110	0	9'3"	20'	29'
<b>LOS ANGELES</b>	110	0	9'3"	20'	28' 6"
<b>ATLANTA</b>	115	5	8'9"	18' 6"	26' 6"
<b>DENVER</b>	110	20	7'9"	16'	23'
<b>MIAMI</b>	180	0	7'3"	15'3"	22'
<b>BOSTON</b>	130	40	6'	12' 6"	18' 6"

\*Refer to engineering letter for project specific rail spans and cantilevers

# You Dream It, We Build It

We understand that not every system is a perfect rectangle. The Vision Module System helps solve real world problems with functional solutions. Think outside the box.

## WEATHERPROOFING

The Vision Module System can be weatherproofed to create sealed, overhead arrays. There are a range of weatherproofing options in terms of cost, durability and project requirements.

SYSTEM	COLOR	COST	DURABILITY	WARRANTY
3M 7070UV	TRANSPARENT	LOW	GOOD	NA
3M EXTREME SEALING TAPE	OPAQUE	MEDIUM	BETTER	NA
GLAZING	OPAQUE	HIGH	BEST	PROVIDED BY INSTALLER



## CUSTOMIZATION

The Vision Module System offers the ability to create custom infill glass modules to allow the integration of non-functional modules to create continuous arrays. Vision custom infill modules can be created in almost any shape and size and incorporate any of the Vision module mounts. Infill panels can be made from polycarbonate, clear glass, frit treatment, or with faux pv cells. Custom infill modules can be used to create “wedges” in curved arrays, provide infill in shaded areas, integrate graphics or logos, create curved edges.

